

SHARP®

solar electricity

The OnEnergy™ Solar Racking System for Asphalt-Shingle Roofs with Flashing Attachment



The Solar Racking System (SRS) included in the OnEnergy™ installation adds a new dimension to solar aesthetics. Its clean, elegant appearance blends beautifully with your home's roofline. Visually, the ultra-low profile rack, covered rails and hidden screws offer a seamless finish. Designed with your roof in mind, the sleek front, top and side trim covers create a clean look, improve water channeling and decrease wind drag.

DESIGNED TO PROTECT YOUR ROOF

The flashing attachment for asphalt-shingle roofs is engineered to secure the racking system and solar modules without compromising the integrity of your roof. The flashing attachment provides extremely reliable waterproof protection in even the worst wet-weather conditions.

ONENERGY™
solar system by Sharp

KEY BENEFITS AND FEATURES:

- **Custom-designed** to your roof's size and shape.
- **Superior Aesthetics** The low-profile rack, black frame and hidden hardware create a sleek appearance.
- **Proven Reliability** 10-year limited warranty on the racking system; 25-year warranty on solar modules.
- **Easily retrofitted** on existing roofs or installed during new home construction.
- **Durable** Components are 100% steel, coated with SuperDyma®, a rugged, corrosion- and scratch-resistant alloy that is superior to galvanized steel.
- **Engineered to Last** Butyl sealant pads assure a waterproof roof.
- **UL-listed** as a complete system.



Tapered front covers and hidden hardware create sleek appearance.



Flashing attachment diverts water and provides superior weather protection.


SHARP: THE NAME TO TRUST

When you choose Sharp, you get more than well-engineered products. You also get Sharp's proven reliability, outstanding customer service and the assurance of our long-term warranties. A global leader in solar electricity, Sharp has more solar modules currently in use than any other company worldwide.

BECOME POWERFUL

The OnEnergy™ Solar Racking System for Asphalt-Shingle Roofs with Flashing Attachment

ROOF ATTACHMENT - Asphalt Shingle with Flashing Attachment

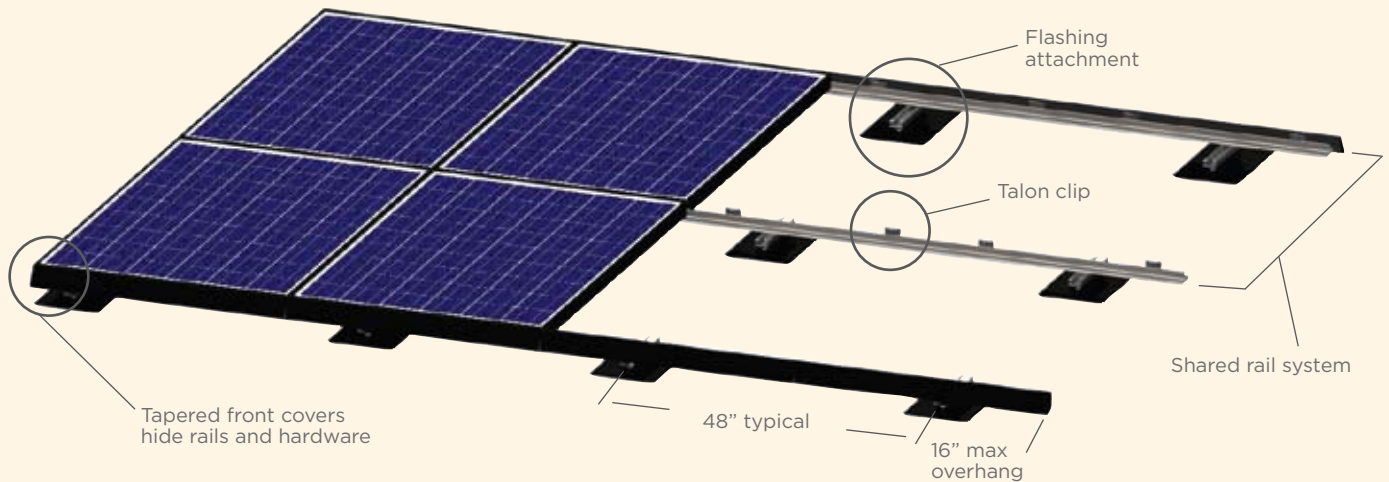


TECHNICAL SPECIFICATIONS

Mounting Type:	Asphalt Shingle w/ Flashing
Average Stand-Off Height:	3 inches
Slider Spacing:	4 feet
Rail Material:	Steel Coated w/ SuperDyma®
Max. System Weight:*	<4 lbs/sq. ft.
UL Listing:	UL 1703
Warranty:	10-year limited warranty

Load tested and verified by a professional engineer to withstand 50 PSF in the upward and downward direction.

* Module and racking. System weight may be less, depending on layout.

TALON CLIP

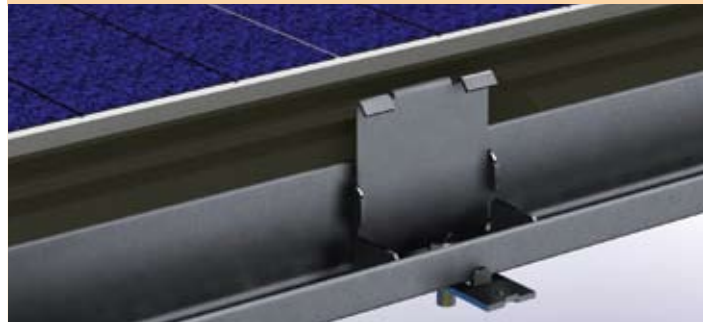

UL-listed as a complete system, the patented Talon Clip grounds the module directly to the rail eliminating the need to connect a ground wire to each and every module.

Design and specifications are subject to change without notice.

Sharp is a registered trademark of Sharp Corporation. All other trademarks are property of their respective owners. Sharp takes no responsibility for any defects that may occur in equipment using any Sharp devices. Contact Sharp to obtain the latest product manuals before using any Sharp device.
08F-018

SHARP®

SHARP ELECTRONICS CORPORATION
5901 Bolsa Avenue, Huntington Beach, CA 92647
1-800-SOLAR-06 • Email: Sharpsolar@SharpUSA.com
www.SharpUSA.com/solar